


Wepco ROV-Operated Lifting Anchor

The ROV-operated lifting anchor is specially designed for lifting of guide-posts. It is manufactured in confirmation with the requirements of the Machinery Directive.

The anchor is certified for 4 tons and will fit any post with 76-80 mm hole and internal 90° shoulder.

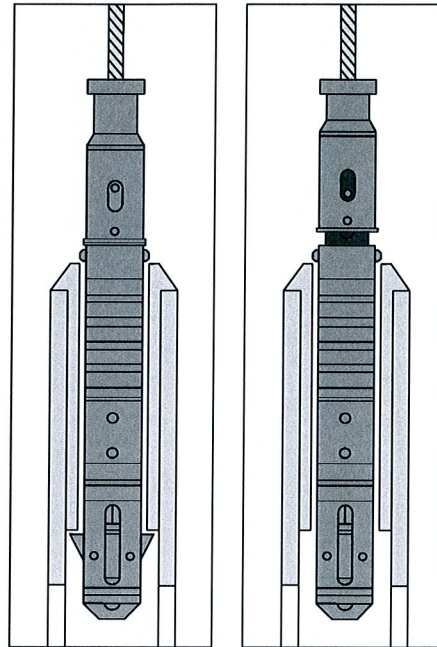

Latched position

The lifting anchor is locked by four spring loaded retainers-dogs at the lower end and two at the top point.

ROV release

The top sleeve is pulled upwards and the four retainers-dogs are retracted into the anchor body.


Technical specifications:

Total length of anchor:	720 mm
Total length including wire: (Std. with 1 or 2 meters)	1720/2720 mm
Weight including 2 m wire:	20,5 kg
Weight including transport bag:	24,0 kg
I. D. of wire-eye:	60 mm
Wire diameter:	19 mm

The lifting anchor is delivered from manufacturer in tested and certified condition. The status is indicated by colour code rings of the year painted or taped around the middle of the lifting anchor.



Operating manual

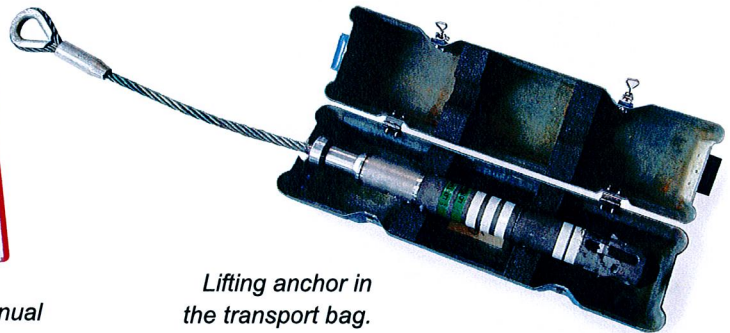

Lifting anchor in the transport bag.

Wepco AS, Finnestadjordet 10, 4029 Stavanger, Norway.
 Telephone: +47 51 87 77 00. Telefax: +47 51 87 77 40.
24-hours service phone: 915 71 702.
 E-mail: wepco@wepco.no www.wepco.no

